

Техническая информация 40-510 | Лак воздушной сушки



1. Свойства

Прозрачный VOC лак воздушной сушки для базовых эмалей baslac

- Простое и безопасное нанесение, быстрая сушка, легкая полировка
- Предназначен для воздушной сушки
- Простая пропорция разведения

2. Нанесение

	Соотношение смешивания 4 : 1	100% по об. 25% по об.	40-510 50-510
	Вязкость DIN 4 при 20°C		20 с
	Жизнеспособность		45 мин / 20°C
	Окрасочный пистолет	HVLP 1.3 мм 2 бар, 0.7 бар внутри дюзы	Традиционный пистолет 1.3 – 1.4 мм, 2.0 бар
	Количество слоев Толщина покрытия	1 слой 40 мкм	2 слоя 50 – 60 мкм

3. Сушка

		<u>На отлип</u>	<u>Монтажная прочность</u>	<u>Готов к полировке</u>	
	Сушка	при 20°C при 60°C	15 мин -	1 ч 5 мин	1 ½ ч После остывания.
	ИК-сушка: (короткие волны) (средние волны)			5 мин. 5 – 10 мин.	

Техника безопасности:

2004/42/IIВ(d)(420)419: ограничение ЕС по содержанию летучих органических соединений (VOC) в данном продукте (категория продукта IIВ.d) в готовом к применению состоянии максимально составляет 420 г/литр. Доля VOC в данном продукте составляет 419 г/литр.

Продукт предназначен для профессионального применения.


The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

BASF Coatings GmbH, Automotive Refinish Coatings Solutions, Europe, Glasuritstraße 1, 48165 Münster, Germany, 07/2017

Техническая информация 40-510 | Лак воздушной сушки



Продукт может содержать частицы размером < 0.1 мкм

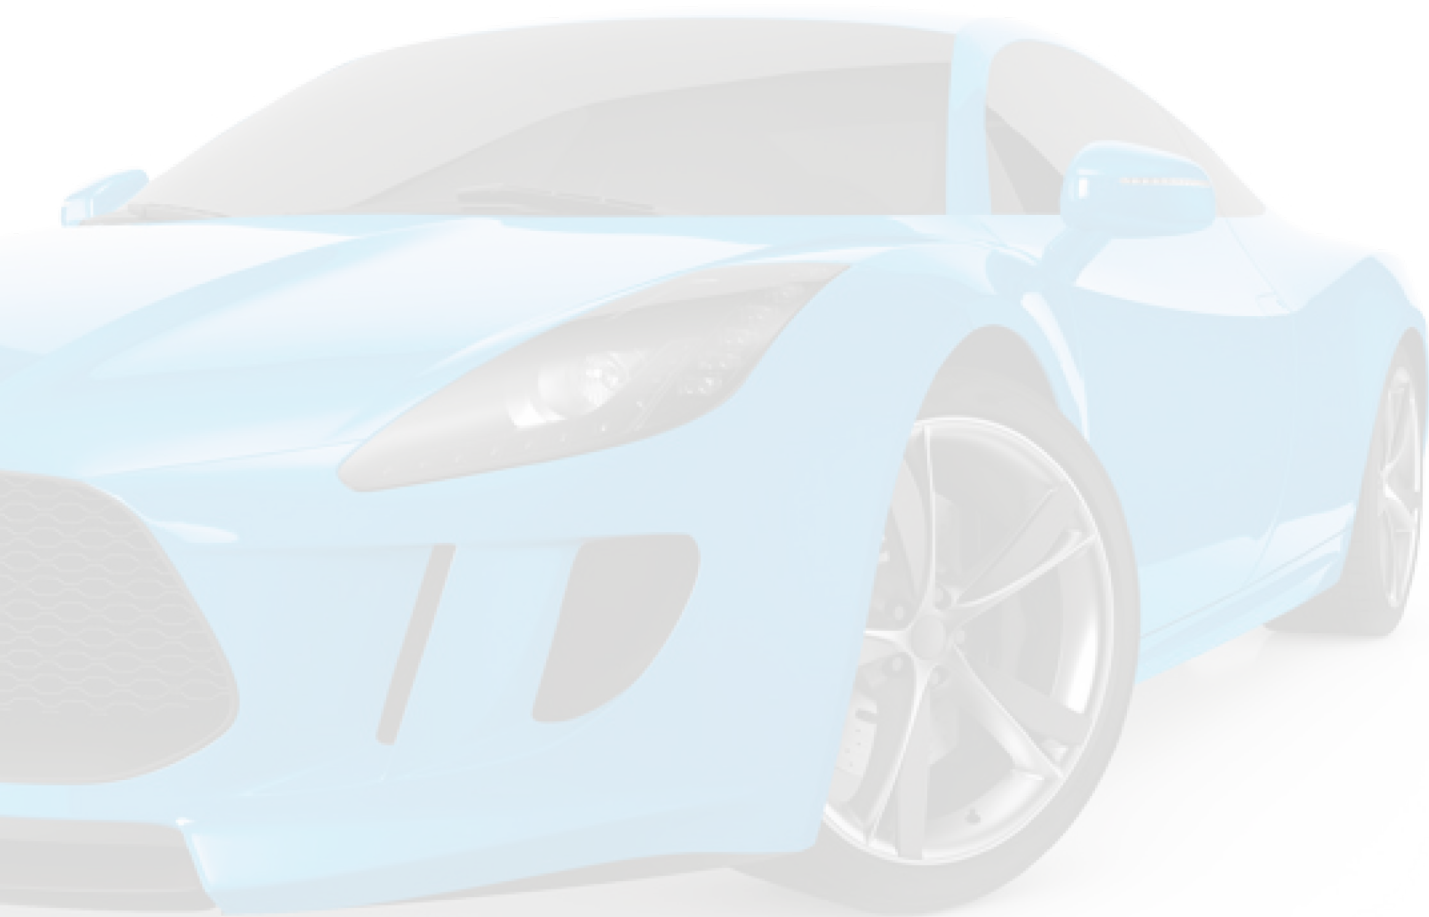

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

BASF Coatings GmbH, Automotive Refinish Coatings Solutions, Europe, Glasuritstraße 1, 48165 Münster, Germany, 07/2017